

# TopCon

Bi-Facial  
565Wp-650Wp



Glass  
To  
Glass



30 Years  
Performance  
Warranty



12 Years  
Manufacturing  
Warranty

**5 GW**

Manufacturing  
Facility



Best in class  
thermal coefficients



Sustain heavy  
snow & wind loads



Highest  
commercial  
gains



Split junction  
box improve  
heat dissipation





Increase  
shade  
tolerance




Highest  
reliability

**Corporate Head Office**  
F27, Amravati MIDC Area,  
Express Highway NH 06,  
Amravati 444607, Maharashtra.

 +91-9146019185  
+ 0721-2520922  
 [info@eceindia.com](mailto:info@eceindia.com)

**Corporate Sales Office**  
2nd Floor, Navle Icon,  
Ambegaon, Pune-411046

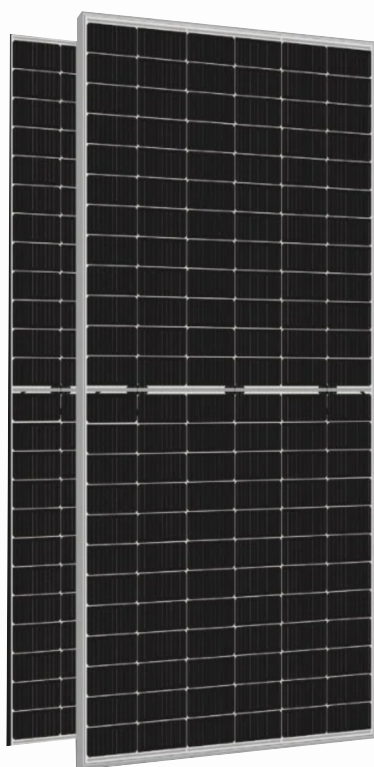


Specifications	ECE144T595
Power (Pm) in Watts (nominal)	595±2%
Open Circuit Voltage (Voc) in Volts	51.91
Short Circuit Current (Isc) in Amps	13.97
Voltage at Max Power (Vmp) in Volts	45.07
Current at Max Power (Imp) in Amps	13.26
Module Fill Factor (%)	82.42
Module Efficiency (%)	23.13%
Maximum System Voltage (Vdc)	1500V
Solar Cells per Module (Units)	144 Half Cut Cells
Max Series Fuse Rating in Amps	30


\* All electrical parameters specified at STC: 25°C cell temperature; 1000W/ M<sup>2</sup> irradiance; AM 1.5

### Mechanical Details

Solar Cells Type	Half cut TopCon
Solar Glass Front & Back	2mm Tempered ARC Coated Glass
Length (L)x Width(W) x Height(T)	2278mm x 1134mm x 29mm
Area	2.58 Sqm
Mounting Hole Pitch (Y)	Y1= 1400mm, Y2=1000mm
Mounting Hole Pitch (X)	1093 ± 2 mm
Mounting hole size	14mm*9mm(± 2 mm )
Weight	≈ 32.5 Kg
Internal Circuit Connection	Copper Ribbon
Frame	Silver (more than 15 micron) Anodized Aluminium
Cells Encapsulant	Front side : POE/EPE Back Side : EPE
Junction Box (Model Type & current Rating)	IP68 Split JB
Connectors	MC4 Compatible
Mechanical Load Condition	Sustain heavy Wind & Snow loads (2400Pa & 5400Pa or 550kg/m2 Maximum diameter of 24mm with hail impact of 83
Cable Length	0.4 Meter

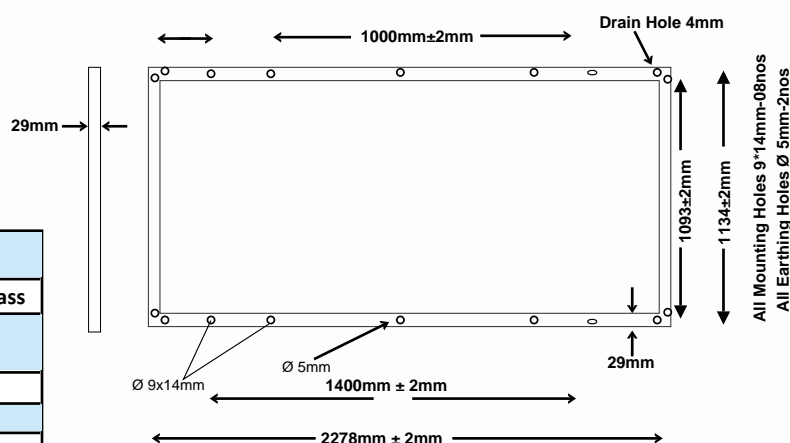

Temperature Coefficients	
Tc of Open Circuit Voltage (β)	-0.02681%/°C±0.02
Tc of Short Circuit Current (α)	0.0469%/°C±0.01
Tc of Power (γ)	-0.3218%/°C±0.02
NOCT	44±2°C

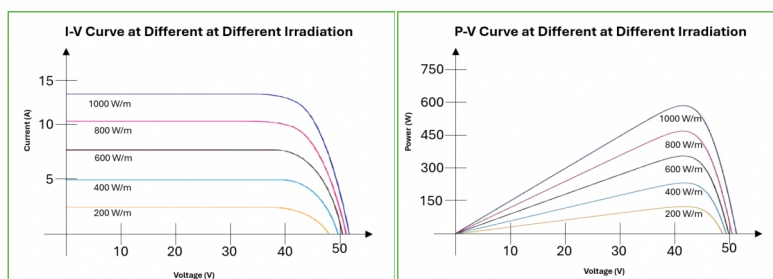

Bi-Facial output - (Back side gain @ STC)		595
15%	Nominal Maximum Power (Pmax) Wp	684.25
	Module efficiency %	26.49
20%	Nominal Maximum Power (Pmax) Wp	714.00
	Module efficiency %	27.64
25%	Nominal Maximum Power (Pmax) Wp	743.75
	Module efficiency %	28.79

### Linear Performance Warranty

